WOOD GRILLE
IN STOCK PROGRAM

MADRID

PRODUCT DATA SHEET

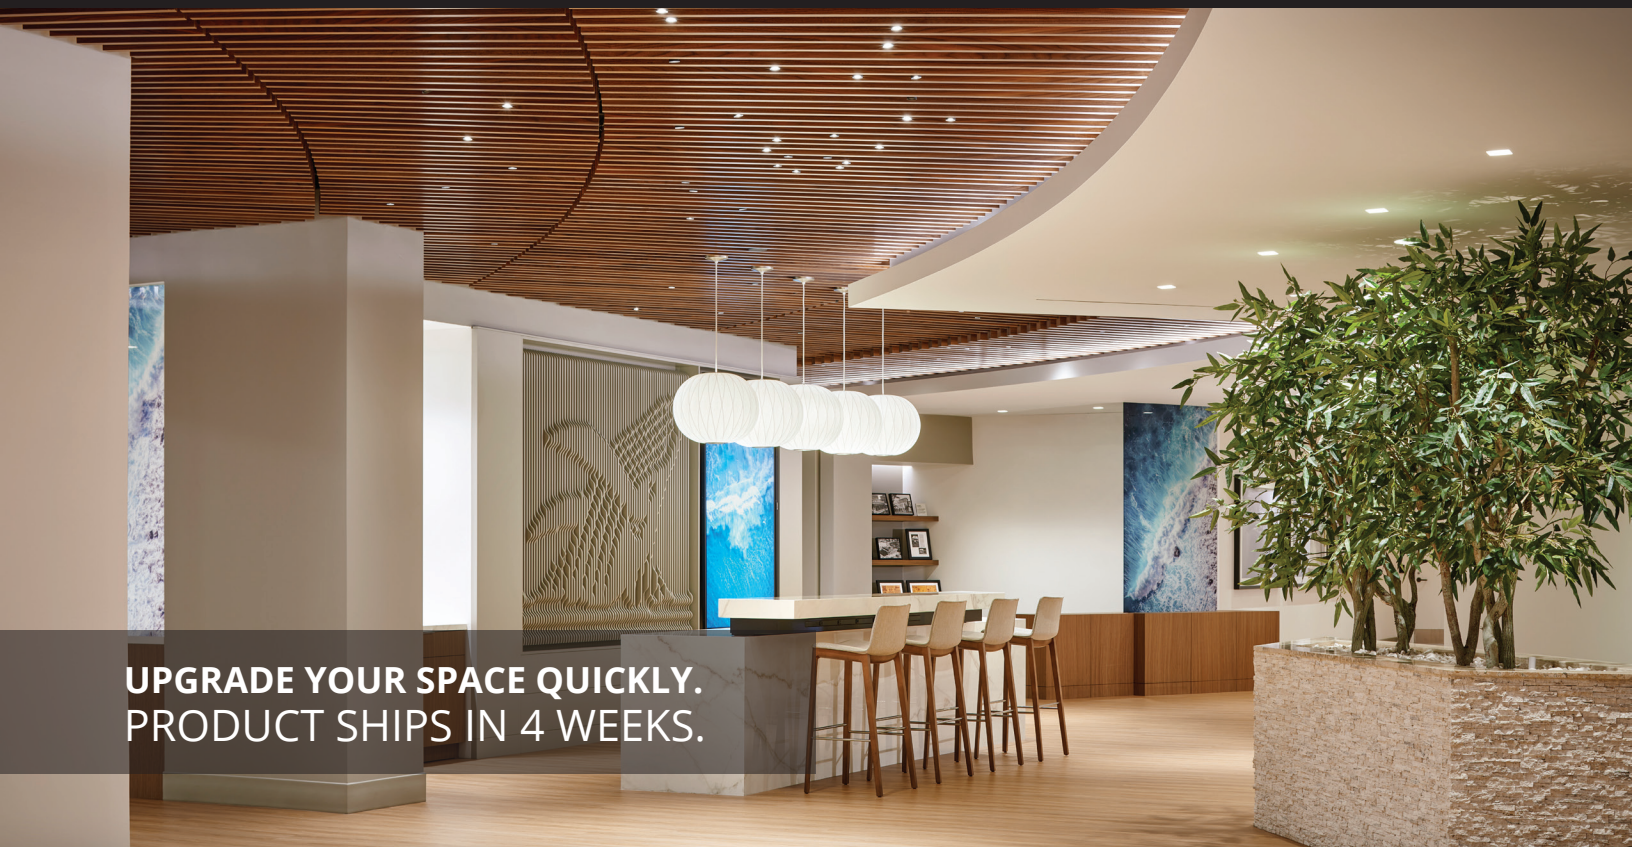

They say good things come to those who wait, but we recognize that not everyone has that luxury. With our Wood Grille In Stock Program, you can upgrade your space quickly without sacrificing quality.

Product Specifications:

- Grille size: 1' x 8'
- Blade size: 3" high x 3/4" wide
- Blade quantities from 2 to 8 per grille
- Wood backer assembly
- Class A fire rated MDF core
- CARB2 (standard) California Phase 2 Compliant
- Clear matte lacquer finish
- 3 veneer options available

WOOD GRILLE
IN STOCK PROGRAM WALL / CEILING PANELS

Optional Features:

- Grille installation clips
- Acoustical fleece backer
- Wood Grille panels are assembled using inlaid wood backer.
- Wood Grille panels are 1' wide x 8' long (nominal), with 2 to 8 blades per panel. Blade widths are 3/4", with blade height of 3".
- Grilles can be installed using self-tapping screws through the backers into the T-grid for ceilings or into wood furring for walls.

Options:

- Easy installation with our backer clips suspended from a heavy duty 15/16" T-grid ceiling.
- Acoustical fleece (black) can be added upon request.

Additional Specifications:

- No added urea formaldehyde resins
- FSC®-certified options available
- California Air Resources Board (CARB) compliant
- 100% Pre-consumer recycled wood fiber content thirdparty certification
- Environmentally Preferable Product (EPP) Grademark Program CPA 2-06
- Scientific Certification Systems (SCS) Third-party certification 100 percent pre-consumer recycled fiber
- May contribute to LEED Recycled Content Credits MR 4.1and MR 4.2
- Density: 47 pounds per cubic foot
- Modulus of rupture: 4,500 psi
- Modulus of elasticity: 550,000 psi
- Internal bond: 140 psi
- Hardness: 955 pounds
- Screw holding: Face: 230 pounds | Edge: 185 pounds
- Linear expansion, maximum average: 0.35 percent
- Thickness swell, 24-hour soak: 6 percent
- Finished with water-based zero VOC Matt 20 finish
- Class A fire rating - veneer on fire-rated MDF
- Over 200 veneer options available
- Excellent sound absorption with acoustical infill panel (NRC 0.85)